



omnipackaging.com

**STRONGER LOAD CONTAINMENT.
SMARTER FILM USAGE.**

3 STRIP SEPARATION

VentX™

**THE FUTURE OF
VENTILATED FILM**

VentX[™] Slitter

Convert standard stretch film into a high-performance wrapping solution that improves airflow, reduces plastic usage, and maintains secure pallet stability.


Omni VentX Slitter is a precision add-on system designed for pallet wrapping machines, developed to improve the performance of standard stretch film.

It converts a 500mm film roll into three controlled bands during the wrapping cycle, while maintaining consistent tension across the load.

The slitting function is manually engaged and adjustable, allowing operators to control when and how the film is slit based on load requirements. This provides greater flexibility across different applications while maintaining reliable wrapping performance.

Omni VentX Slitter operates inline with the wrapping process, applying full-width film at the start and end of the cycle, with slit film used throughout the main wrapping phase to optimise efficiency and containment.

How It Works

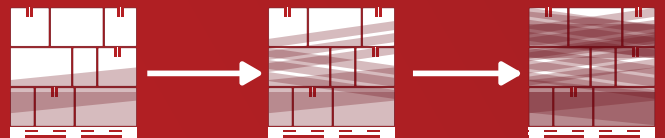

Full width wrap
at top

3 band slitting

Full width wrap
at bottom



SCAN TO SEE
IT IN ACTION

Operator Control

- Manual engagement of slitting function.
- Adjustable control for different load types.
- Simple mechanical adjustment, no complex setup.
- Allows operators to switch between full-width and slit wrapping as needed.

Key Benefits




Stronger Load Containment

Multiple tension bands improve stability and reduce load shifting during transport.



Reduced Film Usage

Optimises material consumption by reducing reliance on full-width film during the main wrapping phase.



Enhanced Airflow

Spacing between film bands allows ventilation for sensitive or temperature-controlled goods.



Lower Operational Costs

Reduced film usage, fewer roll changes, and improved wrapping efficiency contribute to overall cost savings.



Flexible Wrapping Control

Manual adjustment allows operators to adapt wrapping performance to different pallet types.



No Process Disruption

Operates within the existing wrapping cycle with no changes required to workflow or operator handling.



Specification

Product Name	VentX Slitter
System Type	Inline film slitting attachment
Film Input	500mm standard stretch film
Film Output	3 slit bands approx. 150mm each
Slitting	Manually engaged and adjustable
Cycle	Full + Slit + Full
Tension Control	Machine Controlled
Installation	Mounted onto existing pallet wrapper
Maintenance	Low maintenance design
Blade Service	Included under rental

Ideal Applications

VentX is suitable for a wide range of palletised goods and industries:

- Warehousing and logistics operations
- FMCG and retail distribution
- Food and beverage transport
- Export shipments requiring airflow
- Manufacturing and industrial goods
- Products sensitive to moisture or heat build-up



Rental:
\$450 p/m

Includes blade replacement and ongoing support



UPGRADE YOUR PALLET WRAPPING PERFORMANCE TODAY