


VentXTM

VentXTM

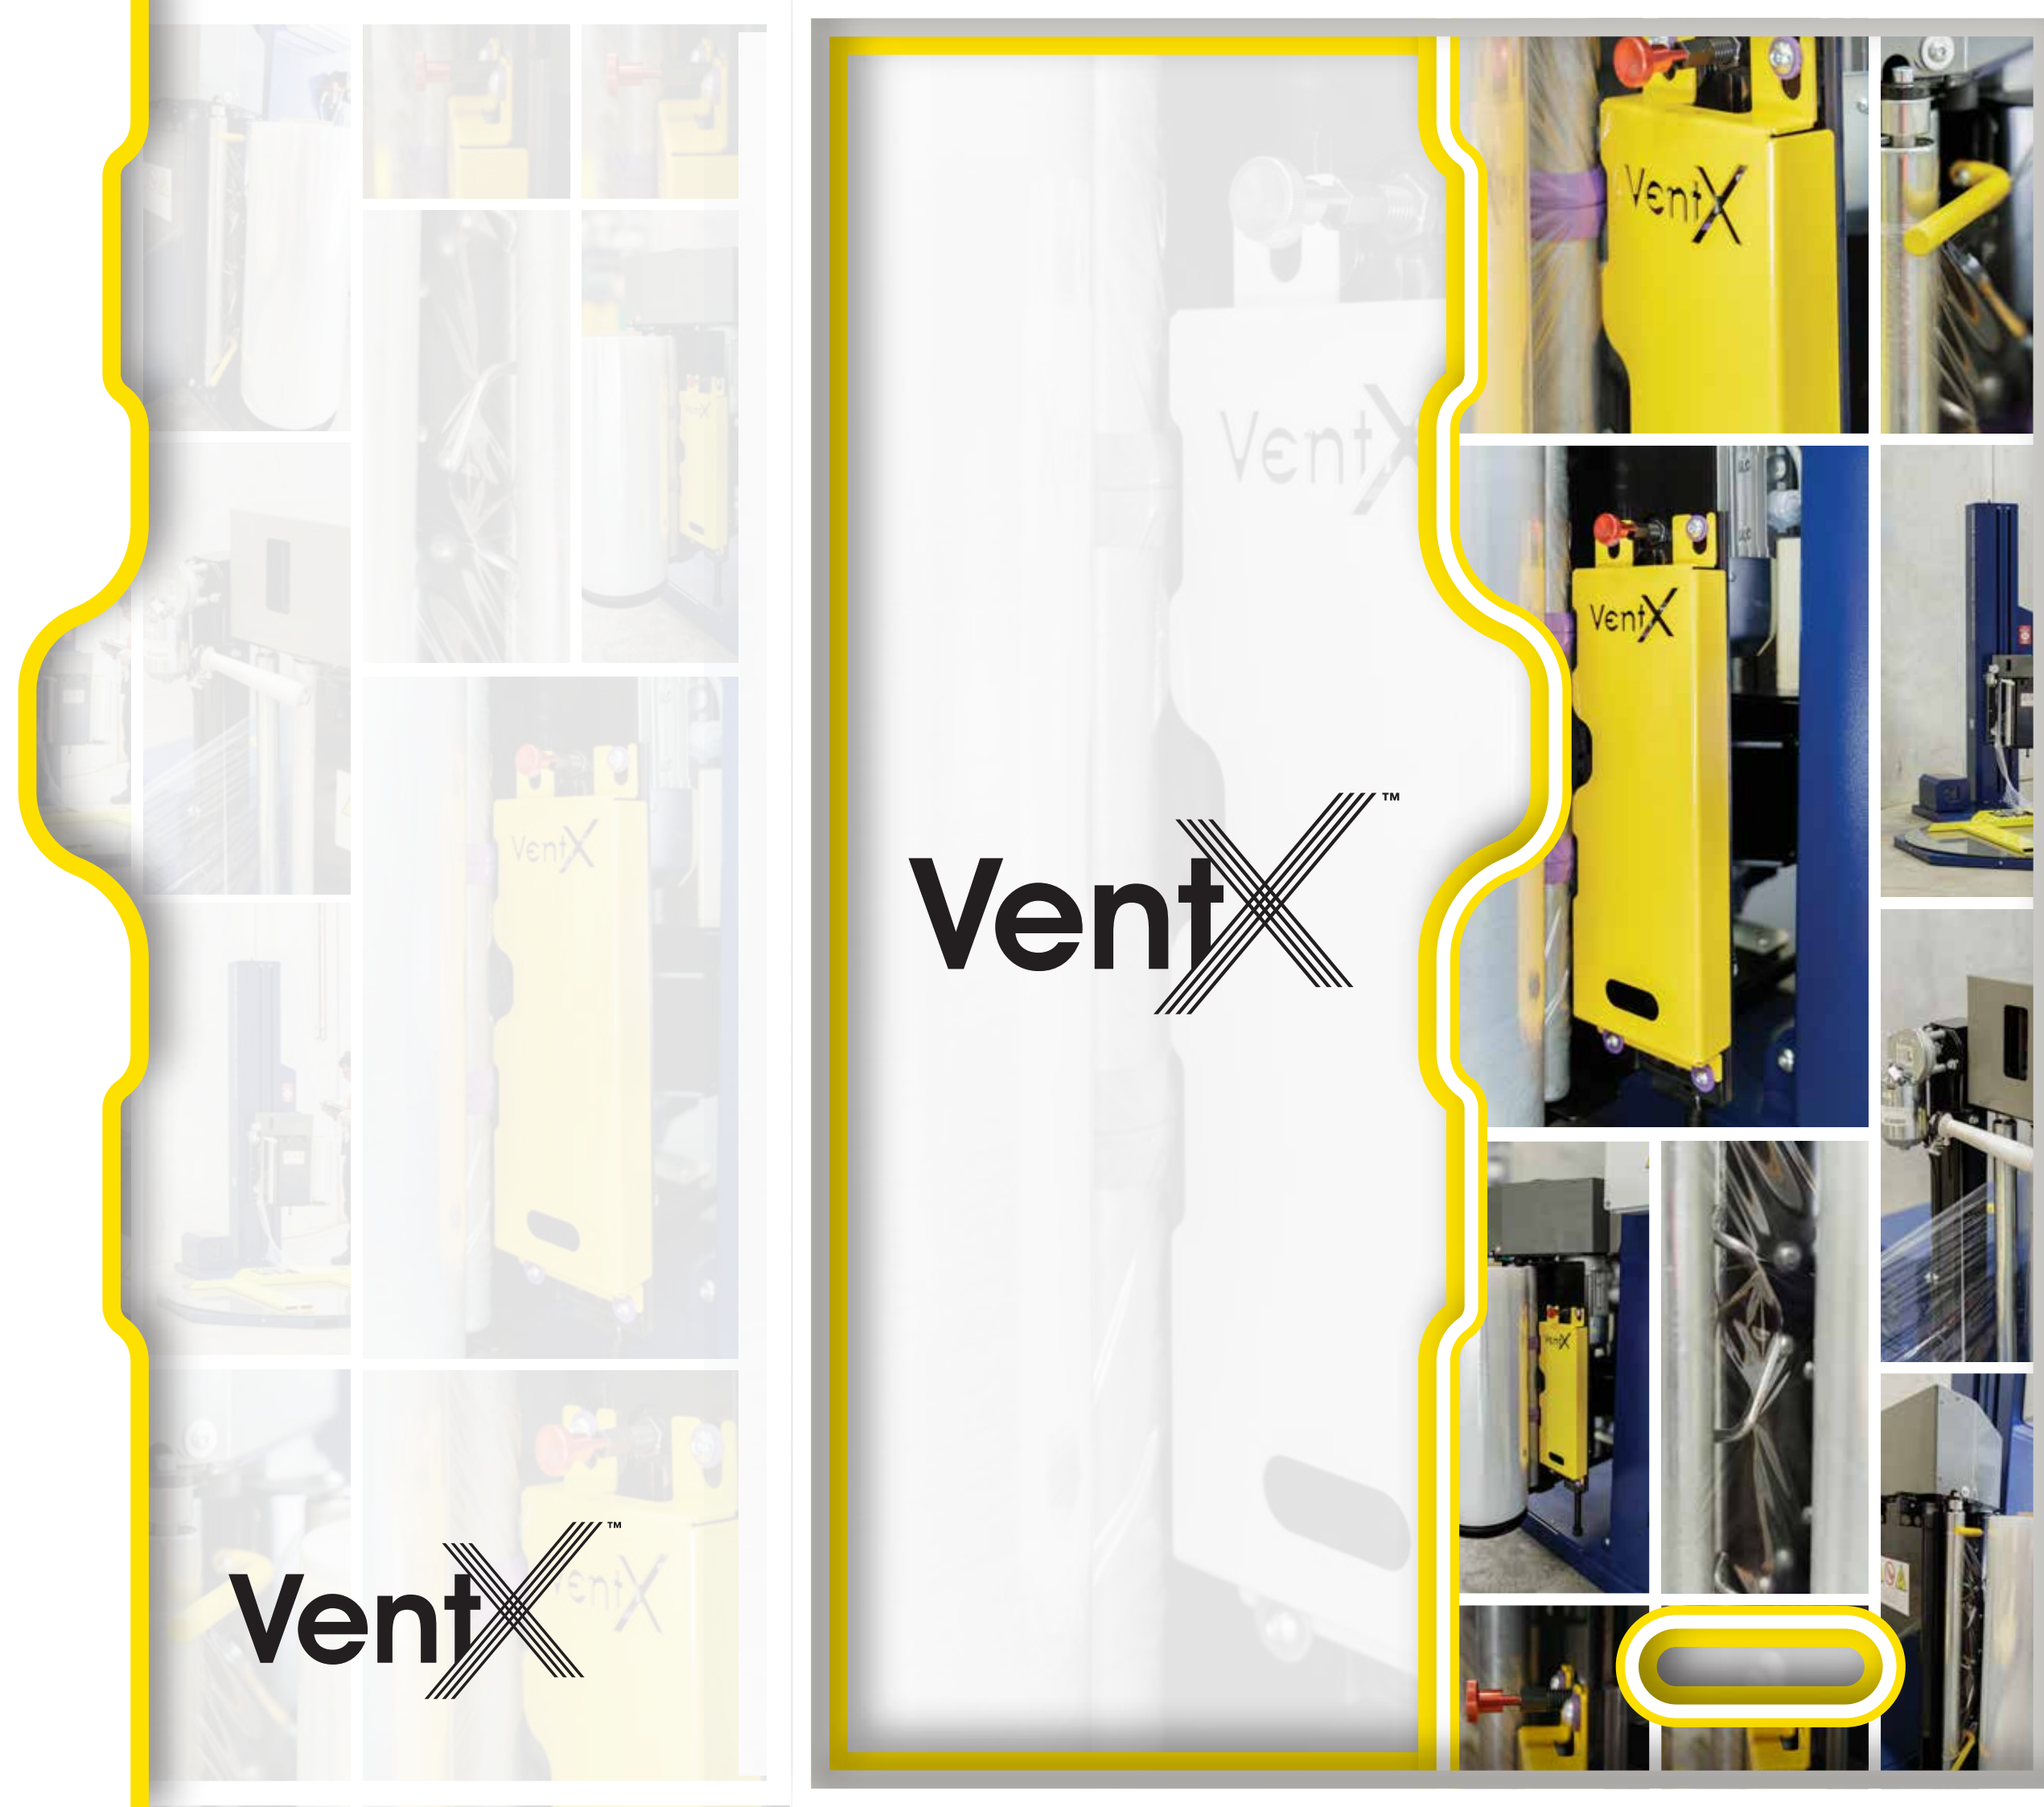

VentX Slitter

Convert standard stretch film into a high-performance wrapping solution that improves airflow, reduces plastic usage, and maintains secure pallet stability.


The **VentX Slitter** is a precision add-on system designed for pallet wrapping machines, developed to improve the performance of standard stretch film.

It converts a 500mm film roll into three controlled bands during the wrapping cycle, while maintaining consistent tension across the load.

The slitting function is manually engaged and adjustable, allowing operators to control when and how the film is slit based on load requirements. This provides greater flexibility across different applications while maintaining reliable wrapping performance.

The **VentX Slitter** operates inline with the wrapping process, applying full-width film at the start and end of the cycle, with slit film used throughout the main wrapping phase to optimise efficiency and containment.

How It Works

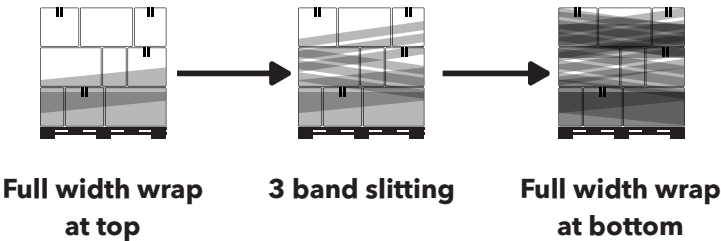

Operator Control

- Manual engagement of slitting function.
- Adjustable control for different load types.
- Simple mechanical adjustment, no complex setup.
- Allows operators to switch between full-width and slit wrapping as needed.


Key Benefits



Stronger Load Containment
Multiple tension bands improve stability and reduce load shifting during transport.



Reduced Film Usage
Optimises material consumption by reducing reliance on full-width film during the main wrapping phase.



Enhanced Airflow
Spacing between film bands allows ventilation for sensitive or temperature-controlled goods.



Lower Operational Costs
Reduced film usage, fewer roll changes, and improved wrapping efficiency contribute to overall cost savings.



Flexible Wrapping Control
Manual adjustment allows operators to adapt wrapping performance to different pallet types.



No Process Disruption
Operates within the existing wrapping cycle with no changes required to workflow or operator handling.

Ideal Applications

VentX is suitable for a wide range of palletised goods and industries:

- Warehousing and logistics operations
- FMCG and retail distribution
- Food and beverage transport
- Export shipments requiring airflow
- Manufacturing and industrial goods
- Products sensitive to moisture or heat build-up



Specification

Product Name	VentX Slitter
System Type	Inline film slitting attachment
Film Input	500mm standard stretch film
Film Output	3 slit bands approx. 150mm each
Slitting	Manually engaged and adjustable
Cycle	Full + Slit + Full
Tension Control	Machine Controlled
Installation	Mounted onto existing pallet wrapper
Maintenance	Low maintenance design
Blade Service	Included under rental



SCAN TO SEE
IT IN ACTION